

REB 15 Az1

By professionals – for the demanding: Electronically controlled battery backpack sprayer



Performance characteristic

- 14.4 V Lithium
- 1 – 4.5 bar
- 5.5 h / 120 litre*
- Battery  < 2 h

*at 1.5 bar / mist



Made in Switzerland

The new battery-operated backpack sprayer: high-performance, versatile, ergonomic...

The completely new concept of controlling the pressure by electronics enables new options for the user. The operating pressure at the nozzle is adjusted with an application controller. Everything is monitored and controlled by the electronics: constant pressure, on, off, pump protection functions and battery charge state. The removable battery enables uninterrupted working. No control wires in the hand valve. Therefore less prone to faults and the accessories can be used to their full extent.




Real work comfort!

- Consistent spray pattern
- Drop size adjustable
- Re-defined ergonomics
- Hose outlet in front
- Click belt system



Electronically controlled

- Continuous operating pressure
- Pressure range:
1 – 4.5 bar (14.5 – 65 psi)
- Protective setup for pump and battery
- Energy efficient

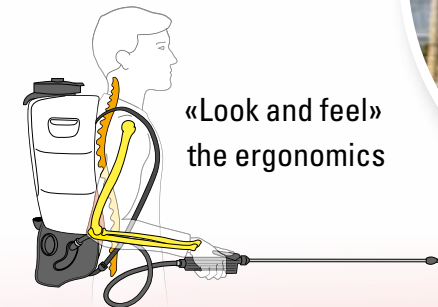

«Look and feel»
the ergonomics



Proven Birchmeier technology

- Robust pump
- Tank outlet via suction system
- New designed click belt system
- Brass nozzle adjustable
- Top quality mountings
- Large filling opening with strainer



Further information



Vario Gun
Art.No. 11558501



Spray hood oval, white
Art.No. 11871101



Spray hood white
Art.No. 11864801



Biofilter
Art.No. 11475701-SB



Spray tube, plastic 1 m
Art.No. 11497403



Telescopic extension 0.45 – 0.9 m
Art.No. 11659001-SB




Spray boom, plastic
Art.No. 11659801-SB


Accessories

More accessories www.birchmeier.com

Spray output REB 15 AZ1 (Nozzle position stream)

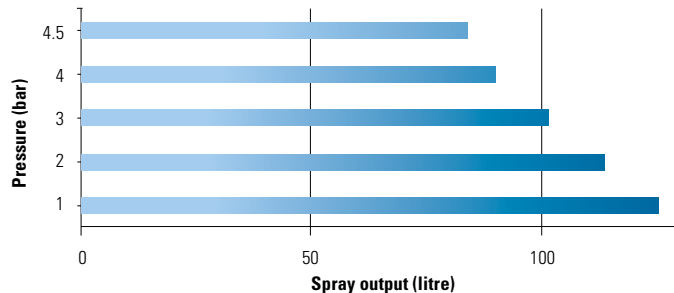

Spray period REB 15 AZ1 (Nozzle position mist)

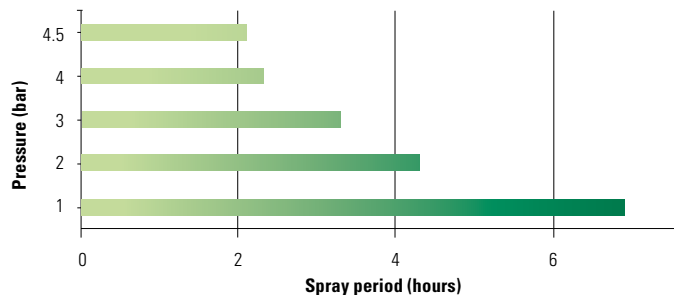

REB 15 AZ1
Art.No. 11956501

Technical Specifications

Tank volume	15 litre (4 US gal)
Max. pressure	4.5 bar (65 psi)
Battery	Lithium-ion battery 14.4 V / 2.25 Ah
Battery charging time	2 h
Life span battery	approx. 800 charging cycles
Nozzle type	Adjustable nozzle
Nozzle material	PP / Brass
Nozzle hole size	1.7 mm
Seals	NBR
Fitting assembly	Compression
Pump	Piston pump 12 V / DC
Min./max. temperature	5 °C – 30 °C (41 °F – 86 °F)
Dimension (H x W x L)	610x400x200 mm (2.0x1.3x0.72 ft)
Emty weight with battery	4.1 kg (9.0 lbs)
Sound pressure level	< 70 dB (A)
Stress class	3

Further Birchmeier products:



Your Birchmeier distributor

BIRCHMEIER®

Birchmeier Sprühtechnik AG
Im Stetterfeld 1
5608 Stetten
Schweiz
Telefon +41 56 485 81 81
Fax +41 56 485 81 82
www.birchmeier.com